


M.R.253



Jeep

Grand Wagoneer/ Truck


I.S.

INFORMATIONS SERVICE
SERVICE INFORMATION
SERVICE INFORMATIONEN
SERVICE INFORMATION
INFORMACIONES SERVICIO
INFORMAZIONI SERVIZIO
SERVICEINFORMASJONER
SERVICE INFORMATIE
SERVICEINFORMATION
INFORMAÇÃO SERVIÇO

9E

APRIL 1986
ENGLISH EDITION

1986 GRAND WAGONEER



ELECTRICAL

Attention: Workshop, Parts Department

INOPERATIVE POWER ACCESSORIES


The following power accessories (listed in the sequence of probability) may experience complete or intermittent loss of use: Power Window, Tailgate Window, Power Mirrors, Power Door Locks and/or Power Seats.

This is due to a power window/door lock harness retaining clip located below the front seat belt retractors (B pillar) protruding into the harness.

PROCEDURE

NOTE: Refer to 1986 Electrical Diagrams P/N 8980 010 070. The circuits involved are located between sections 30 and 34. The potential clip interference may occur between connectors 243 and 244 (left side) and connectors 272 and 297 (right side).

1. Remove both rear sill plates and both seat belt retractors.
2. Remove both left and right harness retaining clips (A).
3. Inspect and repair the wiring harness as necessary.
4. If the harness has been damaged replace both 30 amp circuit breakers in the fuse panel.

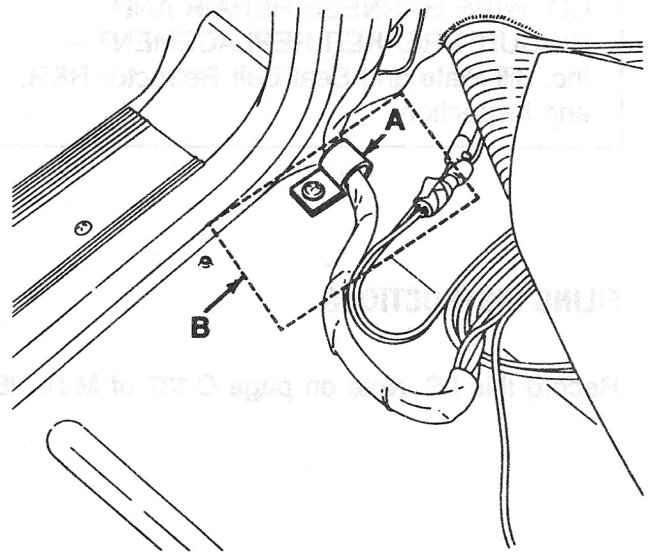

5. Verify proper accessory operation.

101539

6. Seal retaining clip screw holes with RTV sealer.

7. Apply a 4" x 3" patch of Duct Tape (B) to hold the harness in place.

8. Install the seat belt retractors. Torque the seat belt retractor bolt 34-47 N·m (25-35 ft-lbs).

The harness should be routed behind the seat belt retractor plastic stand-offs or the harness may be damaged.

9. Install the sill plates.

PARTS

DESCRIPTION	QUANTITY	PART NUMBER
BREAKER, Circuit 30 AMP	2	323 4524

SRT/TIC

OPERATION DESCRIPTION	NUMBER	TIME	TIC
CO. WIRE HARNESS INSPECTION – Inc. Sill Plate and Seat Belt Retractor R&R	0805	0.5	8-817
CO. WIRE HARNESS REPAIR AND CIRCUIT BREAKER REPLACEMENT – Inc. Sill Plate and Seat Belt Retractor R&R, and Inspection	0811	1.1	8-817

FILING INSTRUCTIONS

Record this I.S. Note on page C-187 of M.R. 253 and file it in the manual.